MODEL "K" DIFFUSER WITH ADJUSTABLE BLADE 2-Slot Model

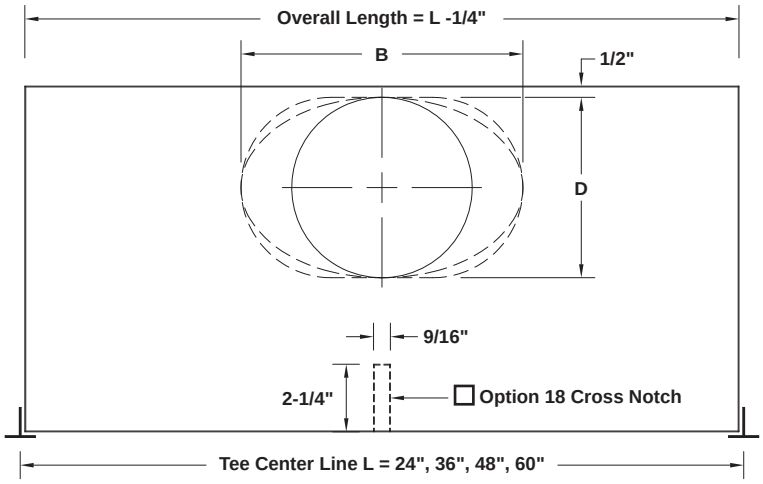

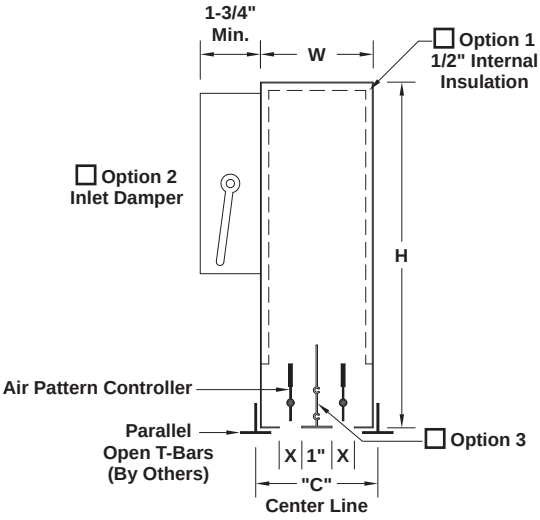

NOMINAL INLET SIZE	B	D	H
6" RD.	5-7/8"	5-7/8"	11-5/8"
8" RD.	7-7/8"	7-7/8"	
10" OV.	11-1/2"	8"	
12" SLOT	14-1/2"	8"	
10" RD.	9-7/8"	9-7/8"	13-5/8"
12" OV.	13-7/8"	9-9/16"	
12" RD.	11-7/8"	11-7/8"	15-5/8"

MODEL	SLOT WIDTH X	W	C
K-50-2	1/2"	3-1/8"	3-3/8"
K-75-2	3/4"	3-5/8"	3-7/8"
K-100-2	1"	4-1/8"	4-3/8"
K-150-2	1-1/2"	5-1/8"	5-3/8"

Material: 24 gauge zinc coated steel. Pattern controller extruded aluminum with felt wiper seal.

Finish: Diffuser face and pattern controller flat black, tees are white.

ACCESSORY OPTIONS



☐ **Option 3** Factory installed Center T



☐ **Option 4** Slot provided in ends to fit astride ceiling grid T-bar (by others)



☐ **Option 5** One side T furnished *



☐ **Option 6** 2-slot one-way blow only – T-extension is added to fit over existing grid T-bar (by others) Slot provided in ends



☐ **Option 7** Both side T's furnished



☐ **Option 8** One pair of TC clips furnished *



☐ **Option 9** Both pairs of TC clips furnished



☐ **Option 10** One pair of TC clips and one side T furnished *

☐ **Option 11** Frame screwed onto plenum lip using pan head screws. Off-white finish. Shipped loose.

☐ **Option 12** Frame for concealed fastening. Off-white finish. Shipped loose. Field Drilled.

Inlet Collar Location: Inlet collar may be offset for packaging purposes.

* *Specify inlet side or side opposite inlet if ordering Options 5, 8, or 10.*

Quantity	Model	Length L	Height H	Inlet Size	Options	Tag

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		**Location**	
Engineer			
Architect		**Dwg. No.**	**Diff.- KS-2**
Contractor		**Date**	**05/10**

KEES INCORPORATED
400 S. Industrial Dr. • P.O. Box L
Elkhart Lake, WI 53020
Phone: (920) 876-3391
Fax: (920) 876-3065
Website: www.kees.com